


Specifications

| | |
|---|--|
| Rated power: 10W | AUX Input: 3.5mm interface; |
| Peak power: 20W | Signal-to-Noise Ratio: 95dB; |
| Speaker Unit: Full-range 1.75" * 5W*2; | Input Impedance: 10Kohm; |
| Charge: USB Type-C DC5V 1000mA; | Bluetooth: V5.3, obstacle-free effective range 15m; |
| Battery: 3.7V2000mA Lithium Battery; | Headphone Output: 3.5mm interface (Stereo); |
| Instruments Input: 6.35 interface; | Charging Time: 2 hours; |
| Signal-to-Noise Ratio: 90dB; | Battery Life: 4-6 hours; |
| Input Impedance: 47Kohm; | Packing Dimensions: |
| Equalization: Bass 100Hz ± 10 dB; | Length 160mm * Width 105mm * Height 110mm; |
| Treble 10KHz ± 1 dB; | Net Weight: 400g; |
| Effects: Reverb; | Gross Weight: 450g. |
| Frequency Response: 40Hz-16KHz; | |

Features

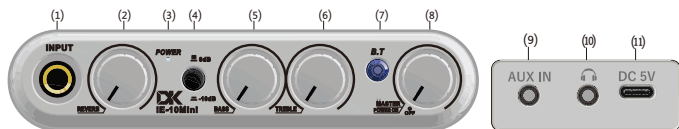

- (1) Input: For connecting audio cables from electric wind instruments, acoustic guitars, etc.
 - (2) Reverb Knob: For adjusting the reverb level of the instrument channel;
 - (3) Power/Charge Indicator Light: The indicator light stays on when the device is on and not charging, and it flashes during the charging process;
 - (4) Gain Switch: When lifted, it is 0dB; when pressed, it is -10dB;
 - (5) Bass Knob: Adjustable for the bass level of the instrument channel, with 0dB at the midpoint, -10dB to the left, and +10dB to the right;
 - (6) Treble Knob: Adjustable for the treble level of the instrument channel, with 0dB at the midpoint, -10dB to the left, and +10dB to the right;
 - (7) Bluetooth Switch: Long press to power on/off, tap to play/pause Bluetooth music, double tap to disconnect the current connection;
 - (8) Power Switch/Master Volume: Rotate clockwise to 35 degrees to turn on, continue rotating to adjust the speaker or headphone volume; rotate counterclockwise to 30 degrees to turn off;
 - (9) Aux In: For connecting smartphones, computers, MP3 players, CDs, and other audio accompaniments;
 - (10) Headphone Interface: Automatically disconnects speaker output when headphones are plugged in;
 - (11) Charging Input: Can be connected to a smartphone charger, computer, power bank, or other USB-5V power sources for charging.
- The battery indicator light (3) flashes during charging and stays on when fully charged.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Packaging Contents

1. IE-10Mini Amplifier*1;
2. USB to Type-C charging cable*1;
3. User manual*1.

