



## Electric Guitar Amplifier User Manual

### iG-10Pro



Guangdong DK Music Electronic Technology Co., Ltd.  
Head Office: Room 306, BLDG B5, Shijing Industrial Zone,  
Guangzhou, Guangdong, China.  
R&D Center: Unit 301, BLDG5, No.16, Jinxing Rd.  
Hi-Tech Zone, Zhuhai, Guangdong, China.  
Telephone: +86-756-3666689  
Email: info@dk-music.cn

## Safety Instructions

Warning: To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.  
Caution: To avoid fire or electric shock hazards, do not open the unit. Refer service to qualified personnel.

1. Use only the power cord provided with the product. If you are unsure of the correct power source, consult the dealer.
2. Do not place the unit near heat sources, such as radiators or other devices that produce heat.
3. Avoid spilling liquids or dropping objects into the unit.
4. Do not attempt to service this product yourself. Opening or removing covers exposes you to dangerous voltages and other hazards. Refer all servicing to qualified service personnel.
5. Unplug the unit during lightning storms or when it will not be used for long periods of time.
6. Prolonged exposure to high volume sounds may cause irreversible hearing damage. Always listen safely.
7. For extended periods of inactivity, fully charge the device, power it off, and perform a charge-discharge cycle every 2-3 months; charge time should be between 2 to 5 hours.


## Product Introduction

Thank you for purchasing the iG-10Pro Electric Guitar Amplifier. This amplifier is designed to provide both clean and overdrive tones for your electric guitar. Equipped with two channels, built-in effects, and a variety of input options, it is a versatile tool for practice and performance.

## Product Features

- 10W Output
- 2 Channels (Clean, Distortion)
- Built-in Effects with Delay
- Dual Power Supply (5V USB Charger)
- Bluetooth (Model iG-10Pro)
- 3.5mm Auxiliary Input and Headphone Output

## Control Panel

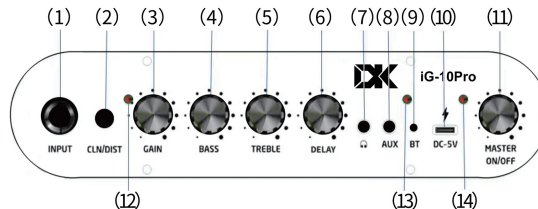

- (1) Input Jack: 6.35mm guitar input jack.
- (2) Channel Switch: Switches between clean and distortion channels.
- (3) Gain Knob: Adjusts the input signal level.
- (4) Bass Knob: Adjusts the low-frequency output.
- (5) Treble Knob: Adjusts the high-frequency output.
- (6) Delay Knob: Adjusts the delay effect level.
- (7) Headphone Jack: 3.5mm headphone output.
- (8) Auxiliary Input: 3.5mm auxiliary input jack.
- (9) Bluetooth Button: Toggles Bluetooth connectivity.
- (10) Power Input: USB-C 5V power supply or charger input.

- (11) Power/Master Volume Knob: Adjusts the overall output volume and acts as the main power switch.
- (12) Channel Indicator: Orange for distortion, off for clean.
- (13) Bluetooth Indicator: Flashes blue when searching, solid blue when connected, and flashes red when the power is low.
- (14) Power Indicator: Green when on, red when charging, off when fully charged.

## Technical Specifications

- Standby Current: < 65mA
- Input Impedance: 1MΩ
- AUX in Impedance: 10KΩ
- Rated Power: 10W (4Ω)
- Max Power: 15W MAX
- Speaker Size: 3 inches
- Frequency Response: 40-16KHz
- Battery: 7.4V/2000mAh
- Battery Life: 5-8 hours
- Dimensions: 215mm × 100mm × 165mm
- Weight: 1450g
- Technical specifications are subject to change without notice

## Accessories

- User Manual x1
- Power Charging Cable x1
- Product Certification x1
- Amplifier Strap x1