



iW-10S
2.4GHz



DK
Presents

DeKode

Wireless Transmission System(EN)

Instruction Manual

(Subject to product updates without prior notice)

Not used for a long time, in order to ensure the service life of the battery,
Please charge your device every three months on average.

1


1. Product Introduction

This product adopts a high-performance 2.4GHz wireless solution, which solves the complexity of wired connections, improves the usage distance, and features an independent frequency locking design to avoid interference issues caused by multiple sets of use.

2. Product Parameters

Frequency: 2400-2483.5 MHz	Bit Depth: 24 bits
Frequency Response: 55 Hz-20 KHz	SNR: 90 dB
Analog Output: 6.35 mm TRS	Transmission Delay: < 8.5 ms
Anti-Interference Mode: Frequency Locking	
Transmission Distance: 20-30 Meters	Sampling Rate: 48 KHz
Power Supply: 3.7 V Polymer Lithium Battery	
Battery Life: 6-8 Hours	Charging Time: 3.5 Hours
Shutdown Voltage: 3.3 V	Battery: 450 mAh
Input Voltage: DC 5V 1A Type-C Charging Port	
Dimensions: 112.5*32.5*16.2 mm	

3. Product Icon

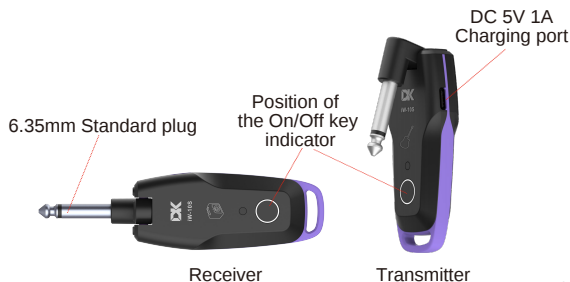

2

4. Product Functions

1. Power On/Off Operation: Press and hold the power on/off button for 3 seconds to turn the device on or off.
2. Power-On and Pairing Status
Power-on indication: When the device is powered on, the white indicator light turns on, and the device automatically activates the pairing function at this time.
White light flashing: Indicates that the transmitter and receiver are not connected successfully.
White light staying on: Indicates that the transmitter and receiver are connected normally.
3. Frequency Locking Function Operation
Operation method: Double-click the power buttons of both the transmitter and receiver within 20 seconds before each power-on.
White light flashing quickly: Indicates that the device is in the frequency locking state (frequency locking is in progress).
White light staying on: Indicates that the frequency locking is successful.
4. Battery Level and Charging
Low battery indication: When the device's battery level is too low, the red indicator light will flash, and the device needs to be recharged in time.
Charging function: Use the matching or standard mobile phone charging cable to connect to a charger for charging (Note: the charger needs to be purchased separately as a product that meets national certification standards.).
5. Charging Indicator Light:
After connecting the charger, the red indicator light turns on: Indicates that the device is being charged.
Red indicator light turns off: Indicates that the device is fully charged.

5. Precautions

1. Do not disassemble, modify, or repair the machine without authorization to avoid short-circuit issues.
2. Do not use the machine in high-temperature, humid, dirty, or areas with strong vibrations.
3. Do not clean the machine surface with solvents such as alcohol to avoid damage.
4. Avoid dropping the machine from a high place or applying strong pressure.
5. If not used for a long time, please charge the machine every 3 months to extend the service life of the lithium battery.
6. The usage distance of the product may vary depending on the environment; please do not use it too close to wireless devices such as wireless routers.

3