

iW-20



Wireless transceiver effect manual

SYSTEM RESPONSE FREQUENCY		20~20KHZ	
Distortion	<0.05%	Transmission distance	30~50m
Delay	<5ms	battery life	4.5hours (varies by environment)

FEATURES

iW-20 has the advantages of strong anti-interference, penetrating obstacles, stable transmission, and low delay. It adds support for Bluetooth accompaniment input on the basis of traditional wireless transmission.

ACTIVATION

- 1. Please charge and activate the wireless system before using the product. Charge until the battery light of the wireless system goes out.
- 2. The iW-20 is equipped with a TYPE-C charging port. We provide you with a double-ended TYPE-C charging cable to charge the transmitter and receiver at the same time.
- 3. If it is not used for a long time, charge the product for more than three months to activate once.

SWITCH MACHINE

- 1. Press and hold the transmitter and receiver for three seconds to switch on and off.




PAIR

- 1. When the transmitter and receiver are turned on, the wireless system will automatically pair. When multiple wireless systems exist at the same time, the device will automatically pair with its own transmitting or receiving device. One-to-one bonded pairing has been performed at the factory. The system has 35 built-in frequency bands, and the paired lights have 7 colors to display different frequency bands. The 35 frequency bands are displayed in 7 color cycle groups. When there is signal interference, you can short press the transmitter button to receive and switch the frequency band, and the receiver will automatically follow the transmitter to switch.
- 2. The signal light of the receiving end will flash if the pairing fails, and the signal light of the receiving end will turn on after the pairing is successful.

MANUAL PAIRING/RE-PAIRING

- 1. You only need to press the transmitter/receiver four times in a row, and when the pairing light flashes quickly, it means that you are re-pairing at this time. After the pairing is successful, the pairing light of the receiving end will always be on.

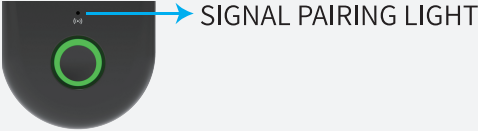

ELECTRICITY

- 1. The battery life of iW-20 can reach 4.5 hours in the experiment, and the specific battery life will have a slight deviation from the laboratory data.
- 2. The power light is always on when the power is sufficient; the power light flashes slowly when the power is low;
- 3. The power light flashes when charging; the power light will go out when fully charged;



SWITCH FREQUENCY

- 1. If there is signal interference when multiple people use it together, you can short press the button on the transmitter to switch the frequency point so that different musicians can use it at different frequency points to avoid signal interference problems.

KEY DESCRIPTION

- 1. Long press the switch
- 2. Short press to switch frequency bands
- 3. Press the transmitter and receiver four times respectively to enter the pairing mode