


Portable Drum Amplifier

User Manual

English

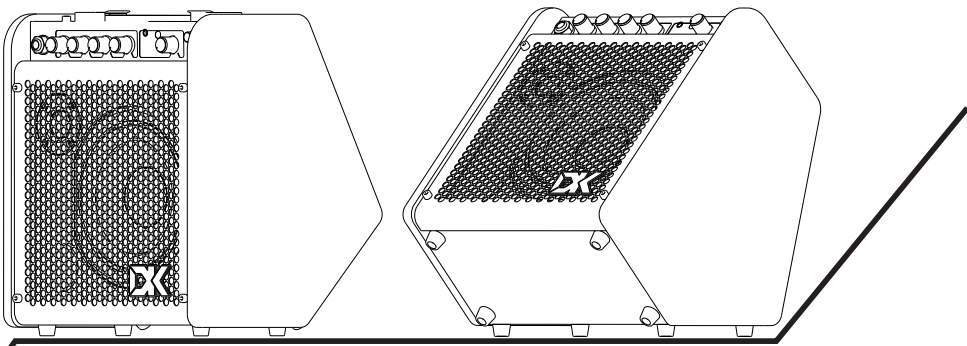

iD-25



Introduction

Thanks for purchasing iD-25, please take a look at this user manual which will help you understand how to use it correctly. If you have any question, please feel free to contact us!

Features

1. Small size body design with 5.5”(LF) + 1.5”(HF) speaker.
2. The speaker responses to the drum's frequency very well, it also compatible with any electronic keyboard, digital piano, Guzhen, Acoustic guitar or synthesizer.
3. Core DSP technology make this small AMP works with its best.

Specification


Power output: 27/35W
Power consumption: 50W
Speaker: 5.5” (LF) + 1.5”(HF)
Adaptor: Input: AC100-240V
Output: DC133.8V 2000mA (27.6w)
Output: DC17.5V 2000mA (35w)

Input 1 (Instrument)
How to connect: 6.35 mono instrument cable
S/N: 90dB
Input impedance: 47Kohm
EQ:
Bass: +/- 9dB 40Hz
MID: +/- 9dB 1.6KHz
Treble: +/- 9dB 15KHz

Input 2 (Music input)
How to connect: 3.5 stereo cable / blue tooth
S/N: 95dB
Input impedance: 68Kohm
Bluetooth: V5.0 version, maximum Bluetooth distance: 15m
Frequency response: 20Hz—20KHz

Net Weight: 3.5kg
Gross Weight: 4kg
Size: 310(L) X 270(W) X 280(H) mm

Control Panel

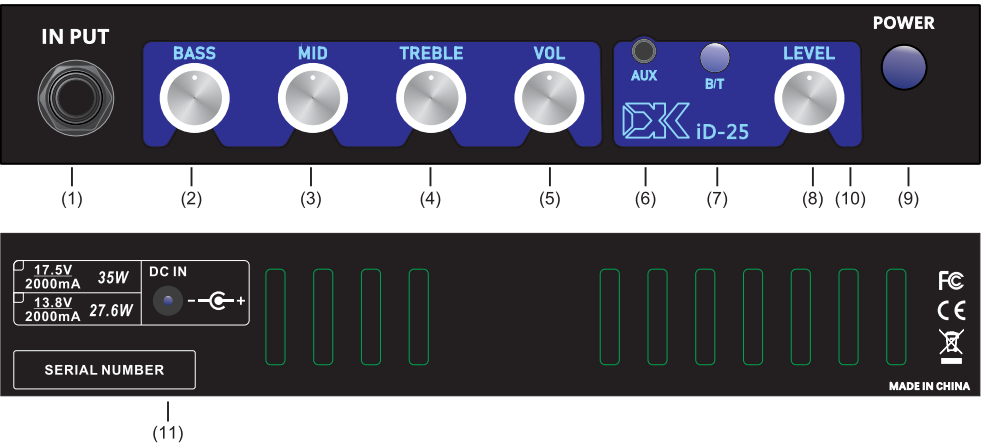

- (1). **INPUT:** connect with instrument
- (2). **Bass** Knob: Adjust the amount of low frequency level.
- (3). **Middle** Knob: Adjust the amount of middle frequency level.
- (4). **Treble** Knob: Adjust the amount of high frequency level.
- (5). **Volume** Knob: Adjust the amount of total volume.

- (6). **AUX-IN:** Input Music by a 3.5 stereo audio cable.
- (7). **Bluetooth:** Input Music through Bluetooth.
How to connect with Bluetooth:
Press BT button shortly, the LED start flashing. Check your cellphone Bluetooth equipment and find “DK iD25” and connect, there is a Ding-dong beep when the drum amp connect with your cell phone successfully.How to turn off Bluetooth: Press BT button for 3 seconds, the Bluetooth will be turned off.
- (8). **Level** Knob: Adjust the amount of music volume.
- (9). **Power button:** Turn on/off amp.
- (10). **Power LED:** LED light on along with the power on, and turned off along with power off.

Rare Panel:

- (11). **DC IN:** Use adaptor to supply power to amp.

Safety Instructions

- 1.Please read manual carefully and follow the manual to Adjust the AMP, keep the manual for future use.
- 2.Pay attention to the caution signs
- 3.Keep the amp away from humid place, e.g bathroom, swimming pool etc.
- 4.Keep the amp in dry place and keep it away from flammable and calorific product.
- 5.Washing by water is prohibited, please use cloth to clean it.
- 6.Use only the supplied accessories.
- 7.Contact us or professional repairing people to repair the amp if there is a problem.
- 8.Keep adaptor away from liquid.
- 9.To protect your hearing, adjust the volume to a proper level before power on.

Accessories

- 1.iD-25 AMP
- 2.Adaptor
- 3.User manual