


iW-20Pro

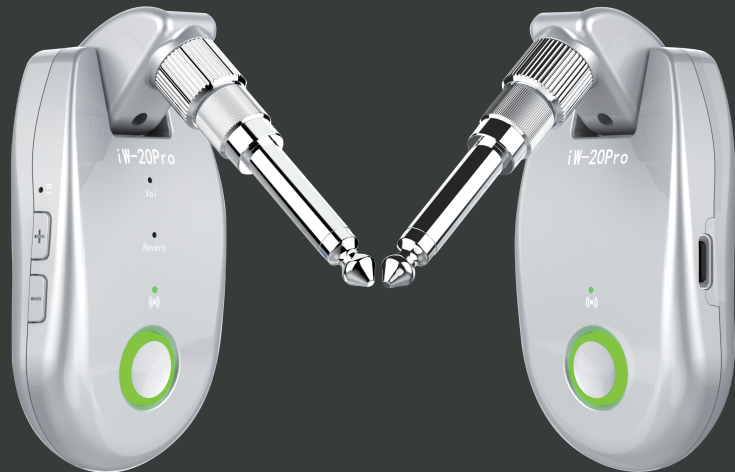

WIRELESS TRANSCEIVER EFFECT MANUAL

SYSTEM RESPONSE FREQUENCY		20~20KHZ	
Distortion	<0.05%	Transmission distance	30~50m
Delay	<5ms	battery life	4hours (varies by environment)

FEATURES


iW-20Pro has the advantages of strong anti-interference, penetrating obstacles, stable transmission, and low delay. On the basis of traditional wireless transmission, it adds the functions of instrument reverb effect, Bluetooth accompaniment, wireless internal recording, and earphone monitoring.

ACTIVATION

1. Please charge and activate the wireless system before using the product. Charge until the battery light of the wireless system goes out.
2. iW-20Pro is equipped with a TYPE-C charging port. We provide you with a double-ended TYPE-C charging cable to charge the transmitter and receiver at the same time.
3. If it is not used for a long time, charge the product for more than three months to activate once.

SWITCH MACHINE

1. Long press the switch on the transmitter and receiver for three seconds to switch on and off.
2. When the transmitter is turned off, the receiver will automatically follow and shut down automatically.

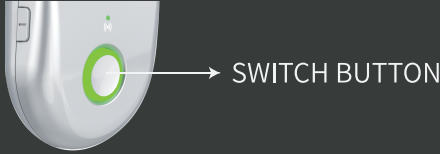

PAIR

1. When the transmitter and receiver are turned on, the wireless system will automatically pair. When multiple wireless systems exist at the same time, the device will automatically pair with its own transmitting or receiving device. One-to-one bonded pairing has been performed at the factory. The system has 35 built-in frequency bands, and the paired lights have 7 colors to display different frequency bands. The 35 frequency bands are displayed in 7 color cycle groups. When there is signal interference, you can double-click the transmitter button to switch the frequency band, and the receiver will automatically follow the transmitter to switch.
2. The signal light of the receiving end will flash if the pairing fails, and the signal light of the

MANUAL PAIRING/RE-PAIRING

You only need to press the transmitter/receiver four times in a row, and when the pairing light flashes quickly, it means that it is re-pairing at this time. After the pairing is successful, the pairing light will always be on.



ELECTRICITY

1. The battery life of iW-20Pro can reach 4 hours in the experiment, and the specific battery life will have a slight deviation from the laboratory data.
2. The power light is always on when the power is sufficient; the power light flashes slowly when the power is low;
3. The power light flashes when charging; the power light goes out when fully charged.



BLUETOOTH

1. Bluetooth is off by default when you turn on the phone, and you can turn it on or off at any time by yourself.
2. Press the transmitter button three times in succession to turn on/off Bluetooth
3. iW-20Pro has built-in Bluetooth accompaniment function. You can search for "dk-iW-20Pro" in the mobile phone -> Settings -> Bluetooth and connect it. After the connection is successful, the accompaniment played by the mobile phone will be transmitted to iW-20Pro. At this time, your The accompaniment and instrumental sounds will blend together.
4. The indicator light will flash when the Bluetooth is turned on, it will be always on after the connection is successful, and the indicator light will be off when the Bluetooth is turned off. Turn on Bluetooth and the system will automatically turn off Bluetooth if there is no connection for 10 minutes

WIRELESS INTERNAL RECORDING

1. To use the wireless internal recording function, you need to connect the wireless internal recording terminal to the mobile phone. If it is an Apple mobile phone that needs a matching Apple adapter, the transmitter will automatically connect to the wireless internal recording after connecting to the mobile phone, and then you can start your recording Or take a short video.
Note: Some mobile phones need to enable OTG internal recording support by themselves.